INDUSTRIAL CATALOG INSERT No. 1

STANLEY®

ROUTERS and KITS

H264 7/8 H.P. ROUTER

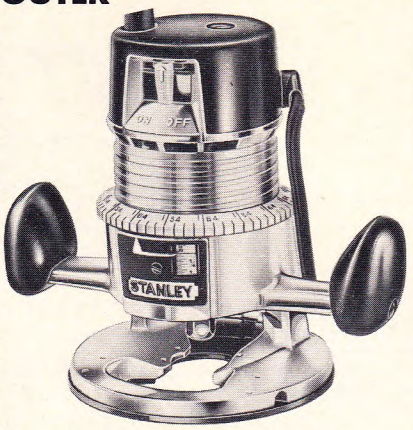

A heavy duty full ball bearing router with exclusive "spot light" to illuminate work area. Here is a high-speed precision tool which includes the most modern design advantages for simplicity and accuracy of all industrial routing operations. The shaft lock holds the switch in the OFF position for safety when changing bits and cutters — and only **one** wrench is needed! Micro-depth adjustment gives depth settings as fine as 1/4 of 1/64". Cantilevered base gives full view of work area; functionally designed handles for better stability, balance, comfort. Clamping lever holds or releases motor in router base with a flip of the finger. (Motor interchangeable with Stanley **82930** (GA-H285) Plane Attachment.) Includes H258 (7/8 h.p.) Motor, **82810** (GA-H74) 1/4" Chuck, **82902** (GA-H279) Router Base, **82903** (GA-H293) Router Light, **22760** (MS1722) Bulb, Wrench. Voltages: 115, 230 (125V. available); 6.0 Amps @ 115V. Speed — 23,000 r.p.m., Motor dia. 3 5/8", Length 7 1/4"; Net Weight 8 1/2 lbs., Shipping Weight 9 1/2 lbs.

H267 1 1/4 H.P. ROUTER

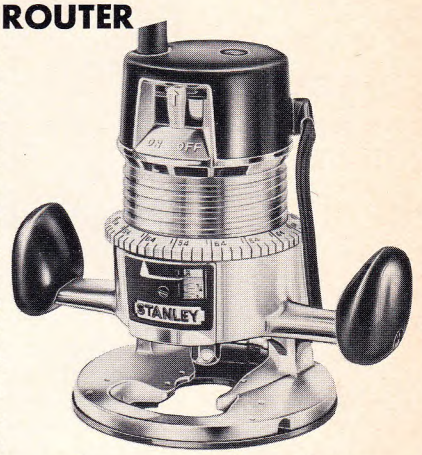

With its extra power and 27,000 r.p.m. speed, this full ball bearing, heavy duty Stanley Industrial Router cuts with almost unbelieveable speed and ease, producing finished shapes and surfaces smoother than you can sand. Cantilevered base and **exclusive** spot light gives clear view of work area at all times. Recessed switch automatically locks shaft for safety when changing bits and cutters — only **one** wrench needed! Depth settings as fine as 1/4 of 1/64" for true precision accuracy through simple micrometer depth adjustment. Even the multi-grip handles are "human engineered" for comfort, balance and stability. Clamping lever holds or releases motor in router base with flip of the finger. Includes: H260 (1 1/4 h.p.) motor, **82810** (GA-H74) 1/4" Chuck, **82902** (GA-H279) Router Base, **82903** (GA-H293) Router Light, **22760** (MS-1722) Bulb, Wrench. Voltages 115, 230 (125V. available). 9.0 Amps @ 115V. Speed — 27,000 r.p.m.; Motor Dia. 3 5/8", Length 7 1/2". Net Weight 9 lbs. Shipping Weight 10 lbs.

These Routers covered by U.S. Pat. Nos. 2562143, 2897302 and other patents pending. All Universal type Stanley made motors operate on AC or DC, 60 cycles or less.

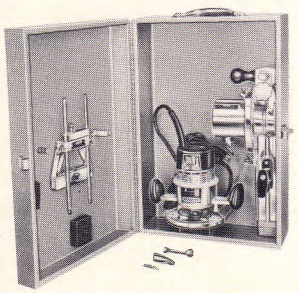

ROUTER-PLANE KIT

H294-5 (H294) 7/8 H.P. KIT

STANDARD EQUIPMENT	H294-5 (H294) 7/8 h.p. KIT
Motor	**H258** 7/8 h.p.*
Router Base	**82902** (GA-H279)
Router Guide	**82907** (GA-H280)
Router Light	**82903** (GA-H293)
Plane Attachment	**82930** (GA-H285)
Arbor	**82807** (GA-H258)
Plane Cutter	**85401** (4166-S)
Router Bit	**85096** (H208)
Carrying Case	**83053** (EPM-H2012B)
Net Weight	30 1/4 lbs.
Shipping Weight	34 3/4 lbs.

* Amperes; 6.0 at 115 volts.

These Kits covered by U.S. Pat. Nos. 2562143, 2897302, 2672172, 2821028.

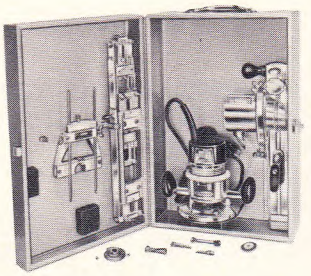

BUILDERS KIT

H297-5 (H297) 7/8 H.P. KIT

STANDARD EQUIPMENT	H297-5 (H297) 7/8 h.p. KIT
Motor	**H258** 7/8 h.p.*
Router Base	**82902** (GA-H279)
Router Guide	**82907** (GA-H280)
Router Light	**82903** (GA-H293)
Sub Base	included with **82902**
Plane Attachment	**82930** (GA-H285)
Arbor	**82807** (GA-H258)
Plane Cutter	**85401** (4166-S)
Router Bit	**85159** (2016)
Templet Guide	**82864** (GA-H299)
Door & Jamb Butt Templet	**83001** (T-H7)
Grinding Arbor	**82805** (GA-H158)
Grinding Wheel	**83024** (MS-H1254)
Carrying Case	**83053** (EPM-H2012B)
Net Weight	33 lbs.
Shipping Weight	37 1/2 lbs.

* Amperes; 6.0 at 115 volts.

ROUTER KIT and ACCESSORIES

ROUTER KITS

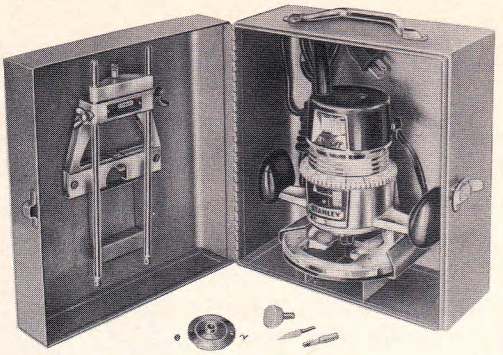

STANDARD EQUIPMENT	H295-5 (H295) 7/8 h.p. KIT	H296-5 (H296) 1 1/4 h.p. KIT
Motor	**H258** 7/8 h.p.*	**H260** 1 1/4 h.p.†
Router Base	**82902** (GA-H279)	**82902** (GA-H279)
Router Guide	**82907** (GA-H280)	**82907** (GA-H280)
Router Light	**82903** (GA-H293)	**82903** (GA-H293)
Templet Guide	**82863** (GA-H298)	**82863** (GA-H298)
Router Bit	**85096** (208)	**85096** (208)
Grinding Wheel	**83021** (MS-H195)	**83021** (MS-H195)
Grinding Wheel	**83023** (MS-H210)	**83023** (MS-H210)
Carrying Case	**83054** (EPM-H2014B)	**83054** (EPM-H2014B)
Net Weight	16 3/4 lbs.	17 1/4 lbs.
Shipping Weight	19 lbs.	19 3/4 lbs.

* Amperes: 6.0 at 115 volts. † Amperes: 9.0 at 115 volts.

These Kits covered by U.S. Pat. Nos. 2562143, 2897302, 2672172, 2821028.



82907 (GA-H280) ROUTER GUIDE — for straight or circular cuts with H264 and H267 Routers. Includes Trammel Point for cutting circles.

ROUTER ACCESSORIES

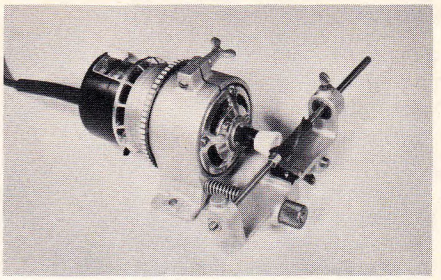

82932 (GA-H286) PLANE CUTTER GRINDING ATTACHMENT — (for H258 and H260 Motors). Used with Bevel Cup Grinding Wheel **83025** (MS-H1393) this attachment will sharpen plane cutter **85401** and others. Includes storage mounting bracket which can be placed on wall or in carrying cases for H294-5 (H294) Router-Plane Kit and H297-5 (H297) Builders Kit. STANDARD EQUIPMENT: Chuck, Bevel Cup Grinding Wheel, Guide Finger, Cutter Spindle, wrench, mounting bracket and screws. Shipping Weight, 6 lbs.

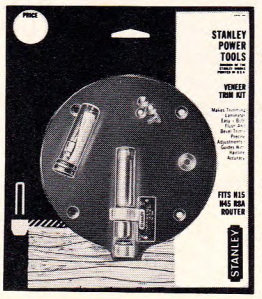

VENEER TRIM KIT

82918 (H317) KIT (for Stanley H264, H267 Routers): Includes precision Trim Guide, special Sub-Base, combination Straight and Bevel Trim Bit, extra stationary Nylon Guide and 4 screws.

TEMPLET GUIDES

PURPOSE	USE WITH ROUTER BASE	A	B	C
	82902 (GA-H279)			
General	**82861** (GA-H296)	5/16	1/4	3/16
Recess and Insert	**82862** (GA-H297)	3/16	5/16	1/4
Small Dovetail	**82866** (GA-H301)	9/64	5/16	17/64
General	**82863** (GA-H298)	3/16	3/8	5/16
Large Dovetail	**82865** (GA-H300)	9/64	7/16	3/8
General	**82859** (GA-H294)	5/16	7/16	3/8
General	**82860** (GA-H295)	3/16	5/8	1 7/32
Hinge Butt	**82864** (GA-H299)	7/16	5/8	1 7/32
Hinge Butt (5/8" radius)	**82869** (GA-H318)	7/16	1 3/8	1 19/64
Special	**82867** (GA-H302)	3/16	3/4	21/32
Special	**82868** (GA-H303)	27/64	13/16	5/8

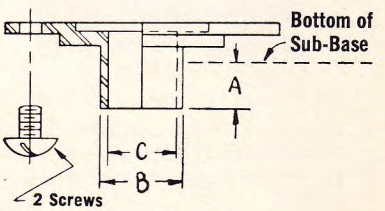

A = Distance Templet Guide tip extends from bottom of base

B = Outside diameter Templet Guide Tip

C = Inside diameter Templet Guide Tip

No. 80041 1/4" DRILL

Incomparable for all basic drilling jobs — perfect for use with all 1/4" drill attachments! Here is quality Stanley construction and human engineering for perfect balance, gripping and working comfort. Top quality oil impregnated bearings assure dependable, smooth operation. Geared chuck and chuck key. Voltage: 115 AC only. (125V. available). 2.0 Amps @ 115V. Speed — 2250 r.p.m. no load, 1500 r.p.m. full load; Capacity — 1/4" Steel, 1/2" wood. Net weight 3 3/8 lbs., Shipping weight 4 1/2 lbs.

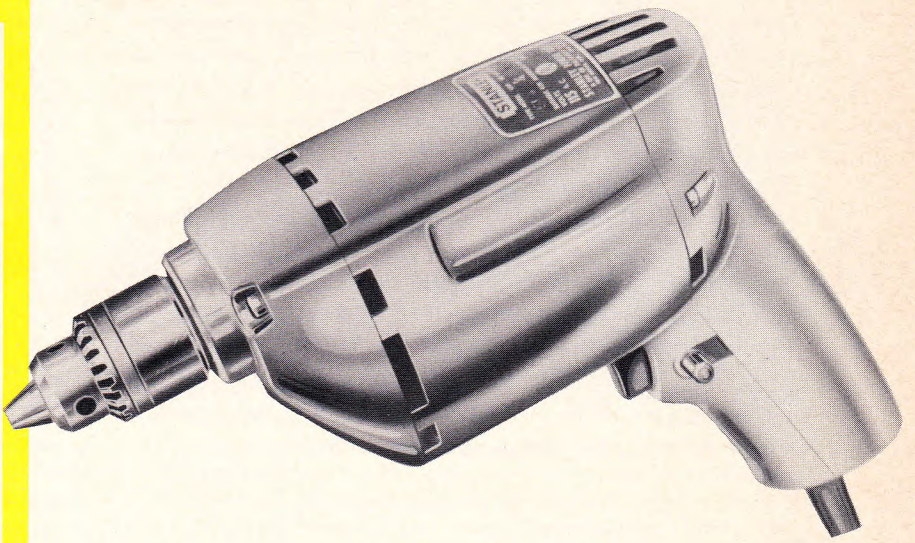

No. 80048 3/8" DRILL

A compact, lightweight general duty drill with the extra power and torque for handling the tougher jobs. Oil impregnated bearings, 6 foot 3-conductor cord for grounding safety, trigger switch with locking button, geared chuck and key. Dynamically balanced Stanley-made motor, 2.0 Amps @ 115 volts, AC (125V. available). Speed — 1000 r.p.m. no load, 700 r.p.m. full load; Capacity — 3/8" steel, 3/4" wood. Net weight 3 3/4 lbs., Shipping weight 4 3/4 lbs.

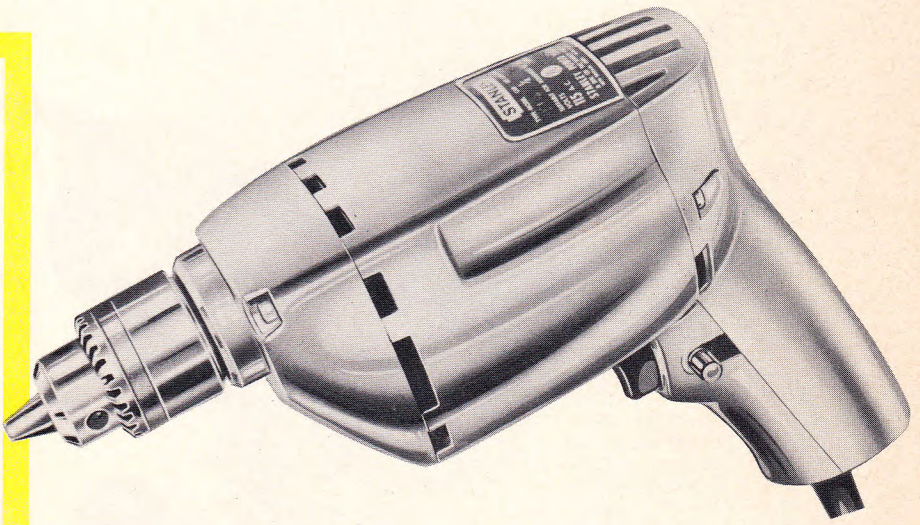

H36 HEAVY DUTY FINISHING SANDER

Maximum efficiency on prolonged sanding jobs whether wood, metal or plastic, is guaranteed with Stanley's powerful air cooled motor and ball bearing orbital action. The wide, flat sanding pad gives fast, efficient coverage. Paper-holder levers are on one side — clearing other side for flush sanding. Auxiliary handle is removable for working in small areas. Has comfortable tapered handle, out-of-way cord, perfect balance and positive slide switch. Includes package of **83219** (H436) assorted Abrasive Paper. Universal type Stanley motor, AC-DC, 60 cycles or less. Voltages: 115, 230 (125V. available). 1.5 Amps @ 115V. Paper size — 3 5/8" x 9" (1/3 Standard Sheet), Pad Size — 3 5/8" x 7 1/16"; Orbit size — 3/16" at 4500 orbits per minute. Length 11 3/8", Width 3 3/4", Height 6 3/8". Net Weight 6 1/2 lbs., Shipping weight 8 lbs.

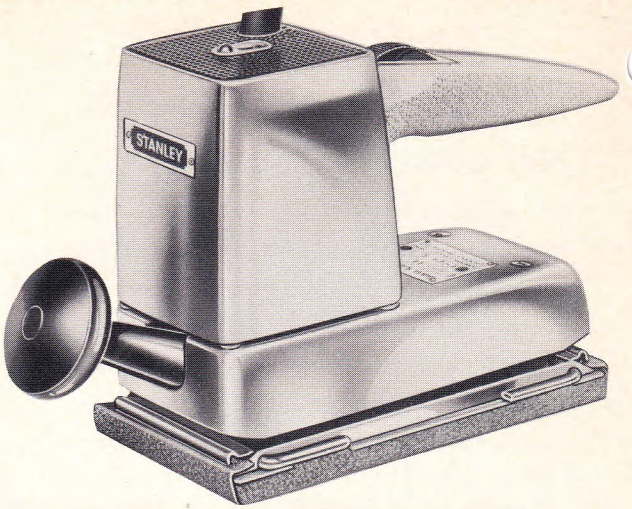

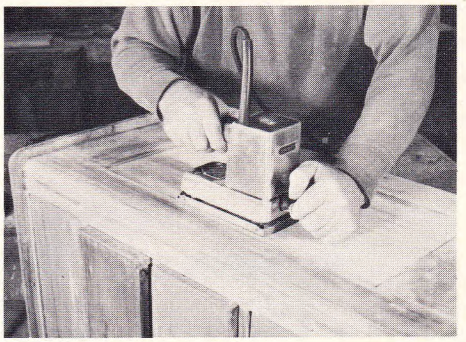

A Stanley Finishing Sander is ideal for recessed paneling and stair risers . . . plus dozens of other standing jobs — refinishing furniture, antiques, removing paint, fitting doors and windows, etc.

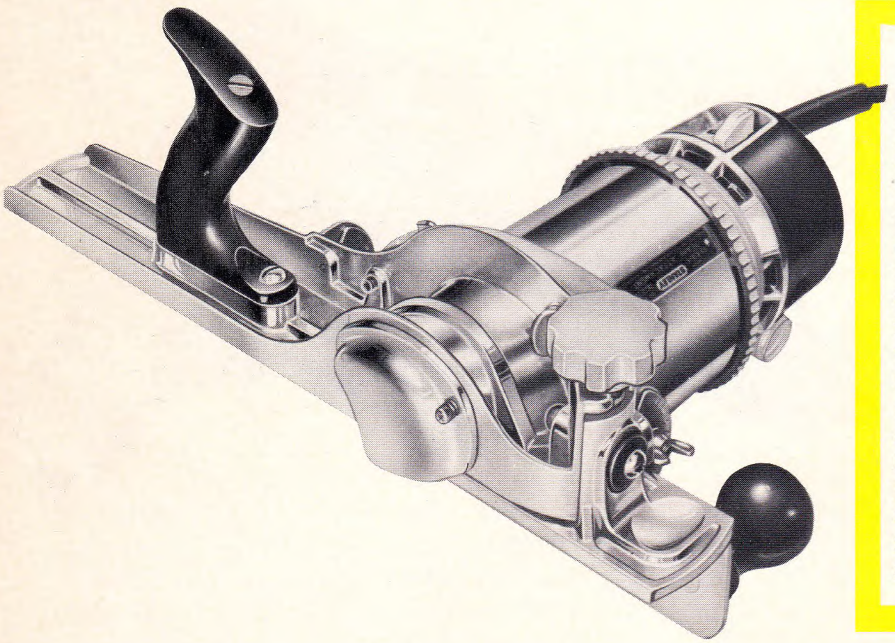

H283 7/8 H.P. POWER PLANE

A heavy duty, 23,000 R.P.M. precision power plane used by contractors, carpenters, and craftsmen for planing dressed lumber, fitting doors, windows, screens, etc. Adjustable apron for bevel planing, direct reading bevel adjustment; electrically safe recessed switch automatically locks shaft for safety when changing cutters. Lever clamping device secures motor firmly. Patented chip disposal, 16" shoe, 2 1/16" wide spiral cutter and 3/32" depth of cut. Motor interchangeable with other quality Stanley attachments. Voltages: 115, 230. (125V. available); 6.0 Amps @ 115V. Includes H258 7/8 h.p. motor, **82807** (GA-H258) Arbor, **82930** (GA-H-285) Plane Attachment, **85401** Spiral Cutter. (**85523** Carbide Straight Flute Plane Cutter also available). Net Weight 9 1/4 lbs., Shipping Weight 11 1/4 lbs.

Printed in U.S.A.